


MINIATURE CIRCUIT BREAKER

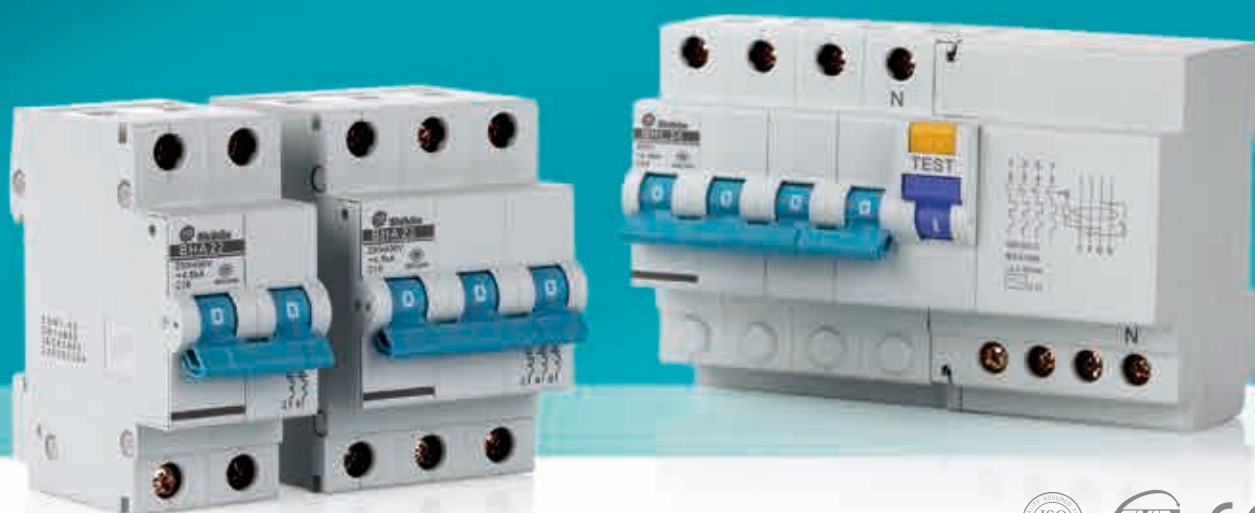

SHIHLIN ELECTRIC & ENGINEERING

MINIATURE CIRCUIT BREAKER BHA Series | 125AF

Applications :

Applicable to the residential, industrial and commercial power distribution systems, such as high-rise buildings, residential apartment and etc., providing circuit-control and protection on equipment against any impacts of overload and short-circuit. It also can be used for any of the application with low switching operation and can be used for circuit changeover.

Type designation :

Type	Rated short-circuit breaking capacity (kA)	Poles (P)	Rated current In (A)
	Rated voltage (V)		
BHA	125: 10kA 230/240V: 1P 400/415V: 2/3/4P	1, 2, 3, 4	80, 100, 125

Standard : IEC 60947-2 / GB 14048.2


Technical Specification :

- Rated voltage : AC 230/240/400/415V
- Rated current : 80/100/125A
- Rated short-circuit breaking capacity : 10,000A
- Tripping characteristics : 8~12In
- Mechanical life : 10,000 operations
- Wire capabilities : Cable cross section max. 50mm²
- Ambient temperature : -30°C~+70°C

Features :




- Provide overload and short-circuit protections.
- Adoption of innovative new materials and manufacturing process with compact size, light weight and excellent appearance.
- Great capabilities in insulation, breaking capacity, arc-extinguishing, faster tripping with long service life and excellent reliabilities.
- Easy installation with the application of standard DIN-rail TH35mm.

Dimension :

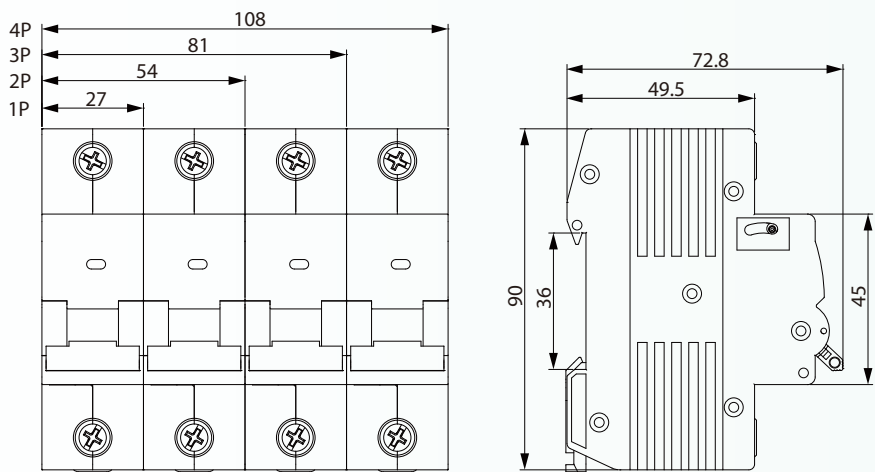



Poles (P)	Rated current (A)	Width (mm)	Weight (g)
1P	80	27	196
	100	27	196
	125	27	196
2P	80	54	393
	100	54	393
	125	54	393
3P	80	81	590
	100	81	590
	125	81	590
4P	80	106	787
	100	106	787
	125	106	787



MINIATURE CIRCUIT BREAKER

BHA DC Series | 10kA

Applications :

Applicable to the residential, industrial and commercial power distribution systems, providing circuit-control and protection on equipment against any impacts of overload and short-circuit.

Type designation :

Type	Rated short-circuit breaking capacity (kA)		Poles (P)	Voltage	Rated current In (A)
	DC125V (1P) DC250V (2P)	DC250V (1P) DC500V (2P) DC750V (3P) DC1000V (4P)			
	4	5			
BHA	10	10	1, 2, 3, 4	DC	1, 2, 3, 4, 5, 6, 10, 16, 20, 25, 32, 40, 50, 63

Standard : IEC 60947-2 / GB 14048.2


Technical Specification :

- Rated voltage : DC 125V / 250V(1P) 、 DC 250V / 500V(2P) 、 DC750V(3P) 、 DC1000V(4P)
- Rated current : 1~63A
- Rated short-circuit breaking capacity : 10,000A
- Rated impulse voltage : 4kV
- Mechanical life : 20,000 operations
- Wiring capabilities : Stranded wire-16mm² / Rigid wire-25mm²
- Ambient temperature : -40°C~+70°C
- * Can't be used in IT system

Features :


- Provide circuit protections -
Good choice for overload and short-circuit protections.
- Variable accessories available -
shunt trip(SHT), under-voltage trip(UVT), over-voltage trip(OVT), auxiliary switch(AX), alarm switch(AL).
- Easy installation -
Modularized structure design can be tool-free installed on standard DIN-rail TH35mm.

Dimension :

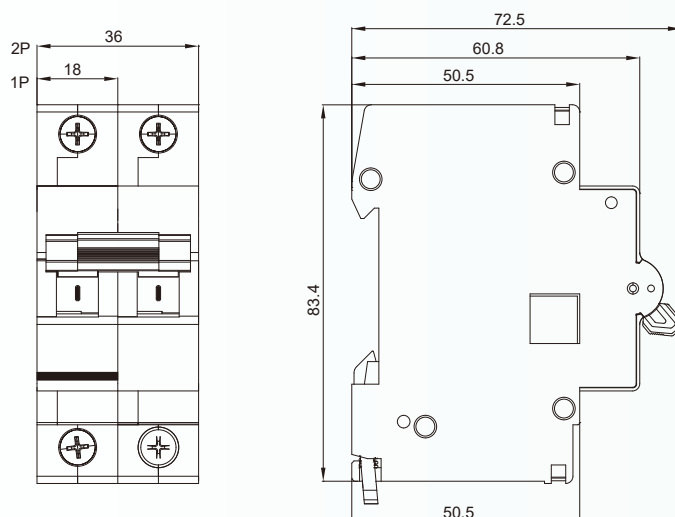



Poles (P)	Rated current (A)	Width (mm)	Weight (g)
1P	1	18	113
	2	18	113
	3	18	113
	4	18	113
	5	18	113
	6	18	113
	10	18	113
	16	18	113
	20	18	113
	25	18	113
	32	18	113
	40	18	113
	50	18	113
	63	18	113
2P	1	36	228
	2	36	228
	3	36	228
	4	36	228
	5	36	228
	6	36	228
	10	36	228
	16	36	228
	20	36	228
	25	36	228
	32	36	228
	40	36	228
	50	36	228
	63	36	228



RESIDUAL CURRENT CIRCUIT BREAKER WITH OVERCURRENT PROTECTION

New BHA Series | 6kA/10kA

Applications :

Application to the residual, industrial, and commercial power distribution systems, provide circuit-control and protection on equipment against any impacts of overload and short-circuit.

Type designation :

Type	Rated short-circuit breaking capacity (kA)	Number of poles (P)	Tripping characteristics	Rated current In (A)
	Rated voltage (V)			
BHA(B3.B4)	3: 6kA; 4: 10kA; 240/415V	1, 2, 3, 4	B type: 3~5In C type: 5~10In D type: 10~15In	1, 2, 3, 4, 5, 6, 10, 16, 20, 25, 32, 40, 50, 63

Standard : IEC 60898/ IEC 60947-2


Technical specification :

- Rated voltage : AC 240/415V
- Rated current : 1~63A
- Rated short-circuit breaking capacity : 6,000/10,000A
- Tripping characteristics :
 - B type : 3~5In
 - C type : 5~10In
 - D type : 10~15In
- Mechanical life : 20,000 operations
- Wiring capabilities : Stranded wire-16mm² / Rigid wire-25mm²
- Ambient temperature : -5°C~+40°C

Features :

- Provide circuit protections – Good choice for overload and short-circuit protections.
- Complete accessories available – shunt trip(SHT), under-voltage trip(UVT), over-voltage trip(OVT), auxiliary switch(AX), alarm switch(AL).
- Easy installation – Modularized structure design can be tool-free installed on standard DIN-rail TH35mm.
- Displays On or Off – Easily understand the breaker condition.

Dimension :

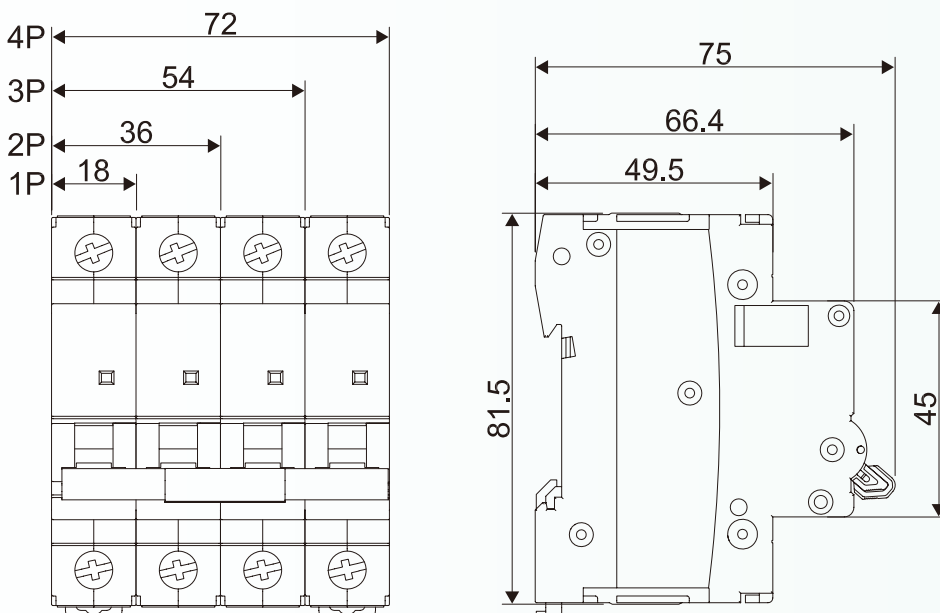

Accessories :

Features :

- Tool-free, left-mounted on the MCBs.
- Maximum of 3 accessories can be installed on to a single circuit breaker at once.
- Maximum of 2 auxiliary switch (AX) can be installed on to a single circuit breaker at once.

Type designation :

BHK

•Accessories

BHK	B10				
↓	↓				
Type	Accessory Code				
	B10	B20	B30	B40	B50
BHK	AL	AX	SHT	UVT	OVT

Note: 1. AL/AX can only be installed on the left side of SHT/UVT

Type	Auxiliary Contact		Width	Product Code	
	AC/12		(mm)		
AL Alarm Switch	AC415V 3A AC240V 6A DC130V 1A DC48V 2A DC24V 6A		9	BHK-B10	
AX Auxiliary Contact	AC415V 3A AC240V 6A DC130V 1A DC48V 2A DC24V 6A		9	BHK-B20	

Type	Control Voltage		Control Voltage	Width	Product Code
	V AC	V DC	AC/12	(mm)	
SHT Shunt Trip	24~48 110~415	24~48 110~415	AC 24~48V DC 24~48V AC/DC 110~415V	18	BHK-B30
UVT Under Voltage Trip	230	48	<170V±5%	18	BHK-B40

Type	Rated Voltage	Current	Over voltage Range	Trip time	Width (mm)	Product Code
OVT Over Voltage Trip	230V	10mA	275V±5%	< 0.1S	18	BHK-B50

MINIATURE CIRCUIT BREAKER

New BHA Series | 6kA/10kA

Applications :

Application to the residual, industrial, and commercial power distribution systems, provide circuit-control and protection on equipment against any impacts of overload and short-circuit.

Type designation :

Type	Rated short-circuit breaking capacity (kA)	Poles (P)	Voltage	Rated current I _n (A)
	Rated voltage (V)			
BHA-B	3S: 6kA	1P+ N (Phase N can be close & open)	C type: 5~10I _n	6, 10, 16, 20, 25, 32

Standard : IEC 60898


Technical Specification :


- Rated voltage : AC 240/415V
- Rated current : 1~63A
- Rated short-circuit breaking capacity : 6,000A
- C type: 5~10I_n
- Mechanical life: 20,000 operations
- Wiring capabilities: Standard wire-16mm² / Rigid wire-25mm²
- Ambient temperature : -5°C~+40°C

Features :

- Provide circuit protections - Good choice for overload and short-circuit protections.
- Complete accessories available - shunt trip(SHT), under-voltage trip(UVT), over-voltage trip(OVT), auxiliary switch(AX), alarm switch(AL).
- Easy installation - Modularized structure design can be tool-free installed on standard Din-rail trip(OVT)
- Display on or Off - Easily understand the breaker condition.

Dimension :

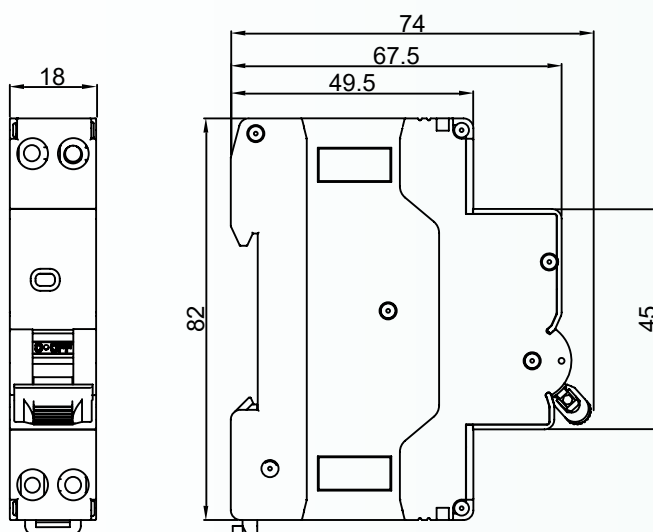



Poles (P)	Rated current (A)	Width (mm)	Weight (g)
1P+N	6	18	
	10	18	
	16	18	
	20	18	
	25	18	
	32	18	

MINIATURE CIRCUIT BREAKER BHA-B DC Series | 6kA/10kA

Applications :

Application to the residential, industrial and commercial power distribution systems, such as high-rise buildings, residential apartment and tec., providing circuit-control and protection on equipment against any impacts or overload and short-circuit. It also can be used for any of the application with low switching operation and can be used for circuit changeover.

Type designation :

BHA-B	D5	4	4	63
Type	DC Voltage Type	Rated short-circuit breaking capacity (kA)	Pole(P)	Rated current In(A)
BHA-B	D5	3: 6kA 4: 10kA	1: 1P DC250V 2: 2P DC500V 3: 3P DC750V 4: 4P DC1000V	1, 2, 3, 4, 5, 6, 10, 16, 20, 25, 32, 40, 50, 63

Certifications : CCC, CB, TUV

Standard : IEC 60947-2

Technical specification :

- Rated voltage Ue: DC 250V(1P) 、DC 500V(2P) 、DC 750V(3P) 、DC 1000V(4P)
- Rated voltage Ui: DC 500V(1P 、2P) 、DC 1000V(3P 、4P)
- Rated current: 1~63A
- Rated impulse withstand voltage Uimp: 4kV
- Instantaneous trip characteristics: $I_{inst} = 10I_n \pm 20\%$
- Altitude: ≤ 2000m
- Electrical endurance: 1,500 operations
- Mechanical life: 20,000 operations
- Relative humidity: 25%–90% RH
- Ambient temperature: -30℃~+70℃
- Atmospheric conditions: Applicable to pollution degree 3 as defined in GB/T 14048.1–2023, section 7.1.3.2.



BHA-B D53




1P (6kA) or (10kA)




2P (6kA) or (10kA)

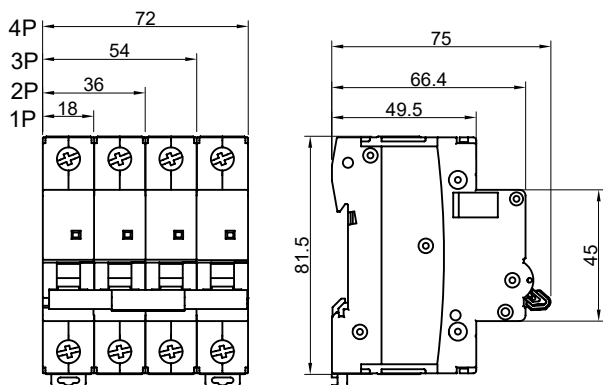

3P (6kA) or (10kA)



4P (6kA) or (10kA)

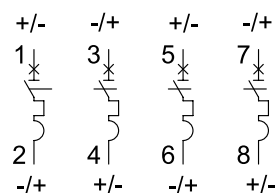



BHA-B D54




1P (6kA) or (10kA)




2P (6kA) or (10kA)

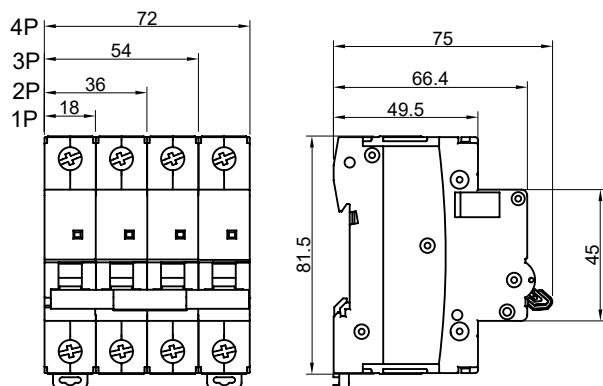

3P (6kA) or (10kA)



4P (6kA) or (10kA)



MINIATURE CIRCUIT BREAKER

BHN Series | Used in the "phase+neutral" circuit, single-phase or three -phase power system

Applications :

In the residential power distribution system with neutral circuit, when the tripping occurs, it breaks the phase wire and the neutral wire simultaneously, isolate the circuit to avoid the electrical shock on the neutral wire even after tripping.

Type designation :

Type	Rated short-circuit breaking capacity (kA)	Poles (P)	Tripping characteristics	Rated current I _n (A)
	Rated voltage (V)			
BHN	2: 4.5kA; 3: 6kA; 230V	1P+N	C type: 5~10I _n	6, 10, 16, 20, 25, 32

Standard : IEC 60898 / GB 10963


Technical Specification :


- Rated voltage : AC 230V
- Rated current : 6~32A
- Rated short-circuit breaking capacity : 4,500 / 6,000A
- Tripping characteristics :
C type : 5~10I_n
- Mechanical life : 20,000 operations
- Wiring capabilities : Stranded wire-10mm² / Rigid wire-16mm²
- Ambient temperature : -5°C~+40°C

Features :


- Adoption of innovative new materials and manufacturing process with compact size, light weight and excellent appearance.
- Breaking the phase wire and the neutral wire simultaneously.
- Great capabilities in insulation, breaking capacity, arc-extinguishing, faster tripping with long service life and excellent reliabilities.
- Bus bar wiring kit available for connection, easy and time-saving for wiring.
- Tool-free installation with the application of standard DIN-rail TH35mm, makes installation easy and convenient.

Dimension :

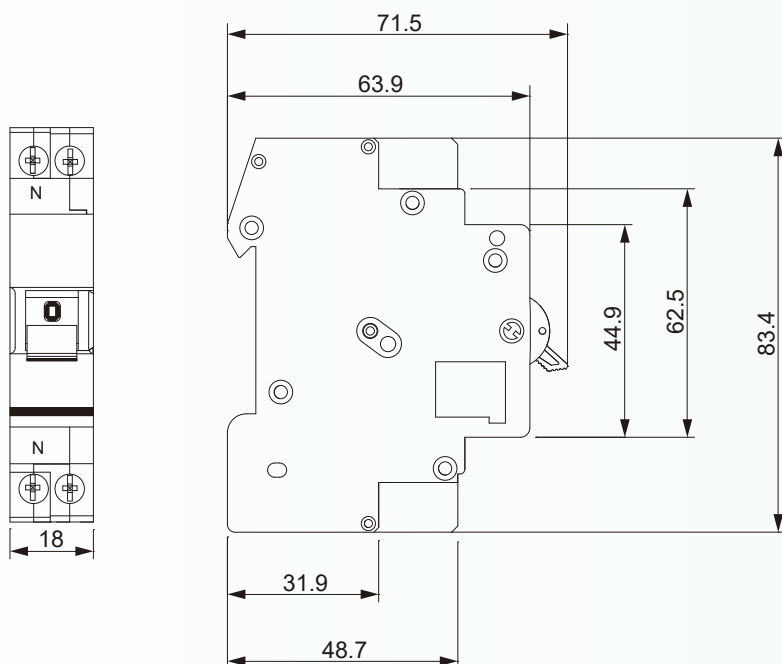



Poles (P)	Rated current (A)	Width (mm)	Weight (g)
1P+N (4.5kA)	6	18	108
	10	18	108
	16	18	108
	20	18	108
	25	18	108
	32	18	108



1P+N (6kA)	6	18	108
	10	18	108
	16	18	108
	20	18	108
	25	18	108
	32	18	108

RESIDUAL CURRENT CIRCUIT BREAKER WITH OVERCURRENT PROTECTION BHL Series

Applications :

Applicable to the residential, industrial and commercial power distribution systems provided with short-circuit, overload and earth-leakage protection.

Type designation :

BHL	2	4	C	32	G
Type	Rated short-circuit breaking capacity (kA) Rated voltage (V)	Poles (P)	Tripping characteristics	Rated current I _n (A)	Optional function (2P)
BHL	2: 4.5kA; 3: 6kA; 230/400V	2, 3, 4	C type: 5~10I _n D type: 10~15I _n	1, 2, 3, 4, 5, 6, 10, 16, 20, 25, 32, 40, 50, 63	over-voltage protection (230V, internal built)

Standard : IEC 61009 / GB 16917


Technical Specification :


- Rated voltage : AC 230V(2P) 、AC 400V(3P/4P)
- Rated current : 1~63A
- Rated sensitivity current : 30mA
- Rated short-circuit breaking capacity : 4,500/6,000A
- Tripping characteristics :
C type : 5~10I_n
D type : 10~15I_n
- Mechanical life : 20,000 operations
- Wiring capabilities : Stranded wire-16mm² / Rigid wire-25mm²
- Ambient temperature : -5°C~+40°C
- Internal OUT over voltage range AC 280V ± 5%

Features :

- Excellent anti-electromagnetic interference capability which avoid the faulty trip caused by a transient over-voltage.
- Tripping indication : Red- indicates earth-leakage tripped; white- no earth-leakage tripping.
- Test button(yellow) provides earth-leakage testing function during the regular maintenance.
- Unique installation design, tool-free installation is realized.


Dimension :

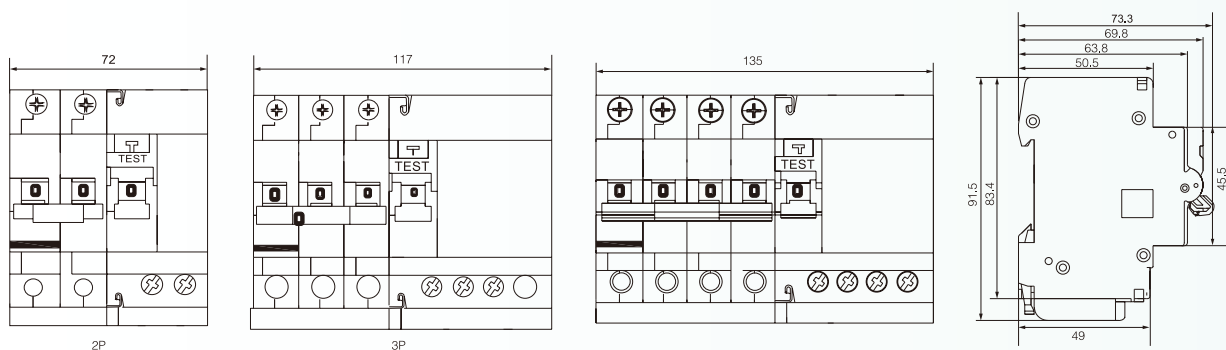




2P

Poles (P)	Rated current (A)	Width (mm)	Weight (g)
1	1	72	423
2	2	72	423
3	3	72	423
4	4	72	423
5	5	72	423
6	6	72	423
10	10	72	423
16	16	72	423
20	20	72	423
25	25	72	423
32	32	72	423
40	40	72	423
50	50	72	423
63	63	72	423



3P

1	1	117	630
2	2	117	630
3	3	117	630
4	4	117	630
5	5	117	630
6	6	117	630
10	10	117	630
16	16	117	630
20	20	117	630
25	25	117	630
32	32	117	630
40	40	117	630
50	50	117	630
63	63	117	630

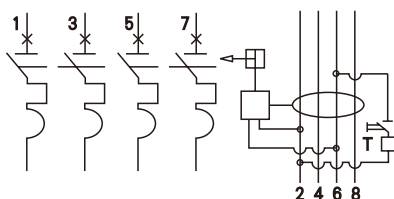

4P

1	1	135	770
2	2	135	770
3	3	135	770
4	4	135	770
5	5	135	770
6	6	135	770
10	10	135	770
16	16	135	770
20	20	135	770
25	25	135	770
32	32	135	770
40	40	135	770
50	50	135	770
63	63	135	770

RESIDUAL CURRENT CIRCUIT BREAKER WITH OVERCURRENT PROTECTION

BHL-A Series | Used in the "phase+neutral" circuit, single-phase or three -phase power system

Applications :

Applicable to the residential, industrial and commercial power distribution systems.

Compact size, provide with short-circuit, overload, earth-leakage and overvoltage protection.

Excellent short circuit and overload protection are able to break phase and neutral simultaneously

Type designation :

BHL-A	3	1	C	32	A	30	G
Type	Rated short-circuit breaking capacity (kA)	Poles (P)	Tripping characteristics	Rated current I _n (A)	Residual current type	Rated sensitivity current (mA)	Optional function
BHL-A	2: 4.5kA; 3: 6kA; 230V	1P+N	C type: 5~10I _n D type: 10~15I _n	6, 10, 16, 20, 25, 32, 40, 50, 63	A, AC	10, 30, 100, 300	over-voltage protection (230V, internal built)

Standard : IEC 61009 / GB 16917


Technical specification :


- Rated voltage : AC 230V
- Rated current : 6~63A
- Rated sensitivity current : 10mA, 30mA, 100mA, 300mA
- Rated short-circuit breaking capacity : 4,500 / 6,000A
- Tripping characteristics :
C type : 5~10I_n
D type : 10~15I_n
- Mechanical life : 20,000 operations
- Wiring capabilities : Stranded wire-10mm² / Rigid wire-16mm²
- Ambient temperature : -30°C~+70°C
- Residual current type : A, AC

Features :


- Excellent anti-electromagnetic interference capability which avoid the fault trip caused by a transient over-voltage.
- Tool-free installation with the application of standard DIN-rail TH35mm, makes installation easy and convenient.
- Reliable usage with N phase breakpoint.
- Electronic type A/AC type leakage protection.
- AC class: Tripping is ensured for sinusoidal, alternating currents, whether they be quickly applied or slowly increase.
- A class: Tripping is ensured for sinusoidal, alternating residual currents as well as for pulsed DC residual currents, whether they be quickly applied or slowly increase.

Dimension :

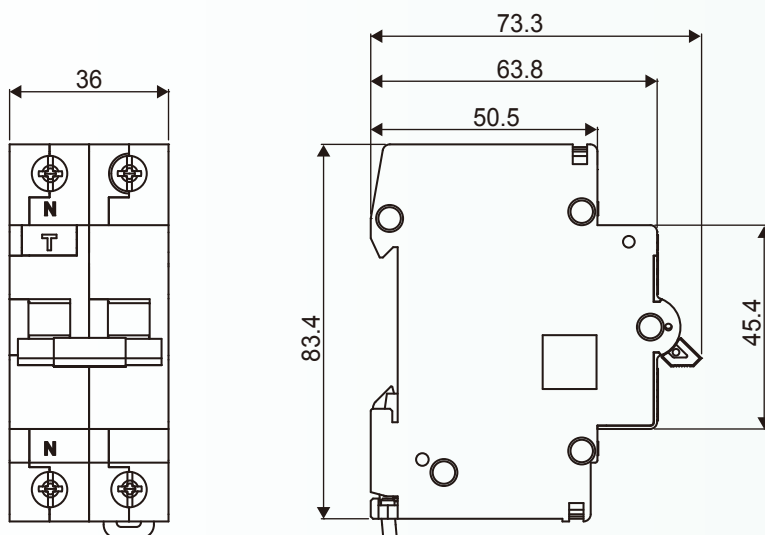



Poles (P)	Rated current (A)	Width (mm)	Weight (g)
1P+N (4.5kA)	6	36	205
	10	36	205
	16	36	205
	20	36	205
	25	36	205
	32	36	205
	40	36	205
	50	36	205
	63	36	205



1P+N (6kA)	6	36	205
	10	36	205
	16	36	205
	20	36	205
	25	36	205
	32	36	205
	40	36	205
	50	36	205
	63	36	205

RESIDUAL CURRENT CIRCUIT BREAKER WITH OVERCURRENT PROTECTION

BHL-B3,B4L Series | 1P+N 、Width: 18mm 、With wiring

Applications :

Application to the residual, industrial, and commercial power distribution systems.

Provide the short circuit, overload, earth-leakage and over current protection.

Excellent short circuit and overload protection able to break phase and neutral simultaneously.

Type designation :

Type	Rated short-circuit breaking capacity (kA)	Poles (P)	Tripping characteristics	Rated current I _n (A)	Residual current type	Rated sensitivity current (mA)
	Rated voltage (V)					
BHL-B	3L: 6kA; AC 230/240V 4L: 10kA; AC 230/240V	1P+N	C, D type	6, 10, 16, 20, 25, 32, 40	A, AC	10, 30, 100

Standard : IEC 61009 / GB 16917


Technical specification :

- Rated voltage : AC 230V
- Rated current : 6, 10, 16, 20, 25, 32, 40A
- Rated sensitivity current : 10mA, 30mA, 100mA
- Rated short-circuit breaking capacity : 10,000A
- Tripping characteristics : C, D type
- Mechanical life : 20,000 operations
- Residual current type : A, AC

Features :

- Excellent anti-electromagnetic interference capability which avoid the fault trip caused by a transient over-voltage.
- Tool-free installation with the application of standard DIN-rail TH35mm, makes installation easy and convenient.
- Reliable usage with N phase breakpoint.
- Electronic type A/AC type leakage protection.
- AC class: Tripping is ensured for sinusoidal, alternating currents, whether they be quickly applied or slowly increase.
- A class: Tripping is ensured for sinusoidal, alternating residual currents as well as for pulsed DC residual currents, whether they be quickly applied or slowly increase.

Dimension :

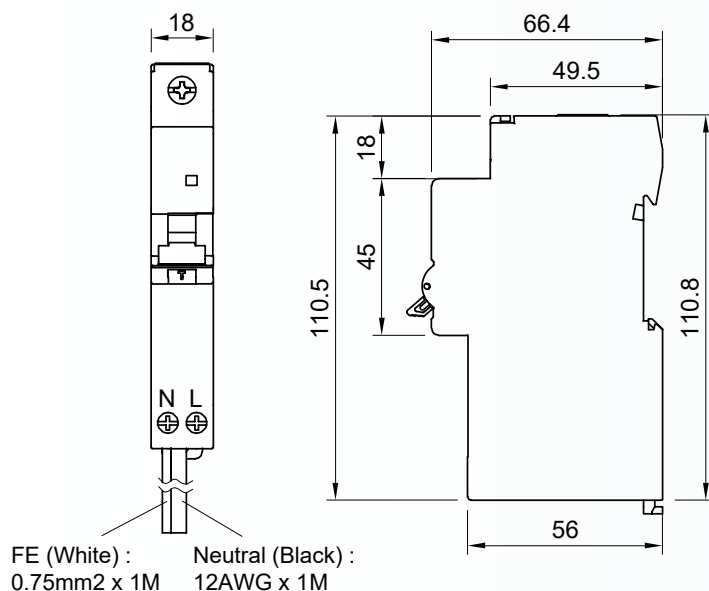

RESIDUAL CURRENT CIRCUIT BREAKER WITH OVERCURRENT PROTECTION

BHL-B Series | Used in the "phase+neutral" circuit, single-phase or three -phase power system

Applications :

Applicable to the residential, industrial and commercial power distribution systems.

Compact size, provide with short-circuit, overload, earth-leakage and overvoltage protection.

Excellent short circuit and overload protection are able to break phase and neutral simultaneously

Type designation :

BHL-B	3N	1	C	6	A	30	
Type	Rated short-circuit breaking capacity (kA)	Poles (P)	Tripping characteristics	Rated current I _n (A)	Residual current type	Rated sensitivity current (mA)	Optimal function (2P)
	Rated voltage (V)						
BHL-B	3N: 6kA 4N: 10kA (At AC 230/240V)	1: 1P+ N	C Type: 5~10I _n D Type: 10~15I _n	6, 10, 16, 20, 25, 32, 40, 50, 63	A, AC	10, 30, 50, 100	Blank: No protection G: Over-voltage protection internal built

Standard : IEC 61009


Technical specification :



- Rated voltage: AC 230/240V
- Rated current: 6~63A
- Rated sensitivity current: 10mA, 30mA, 50mA, 100mA
- Rated short-circuit breaking capacity: 6,000 / 10000A
- Tripping characteristics:
C type: 5~10I_n
D type: 10~15I_n
- Mechanical life: 20,000 operations
- Wiring capabilities: Stranded wire-10mm² / Rigid wire-16mm²
- Ambient temperature: -30°C~+70°C
- Residual current type: A, AC

Features :



- Excellent anti-electromagnetic interference capability which avoid the fault trip caused by a transient over-voltage.
- Tool-free installation with the application of standard DIN-rail TH35mm, makes installation easy and convenient.
- Reliable usage with N phase breakpoint.
- Electronic type A/AC type leakage protection.
- AC class: Tripping is ensured for sinusoidal, alternating currents, whether they be quickly applied or slowly increase.
- A class: Tripping is ensured for sinusoidal, alternating residual currents as well as for pulsed DC residual currents, whether they be quickly applied or slowly increase.

Dimension :

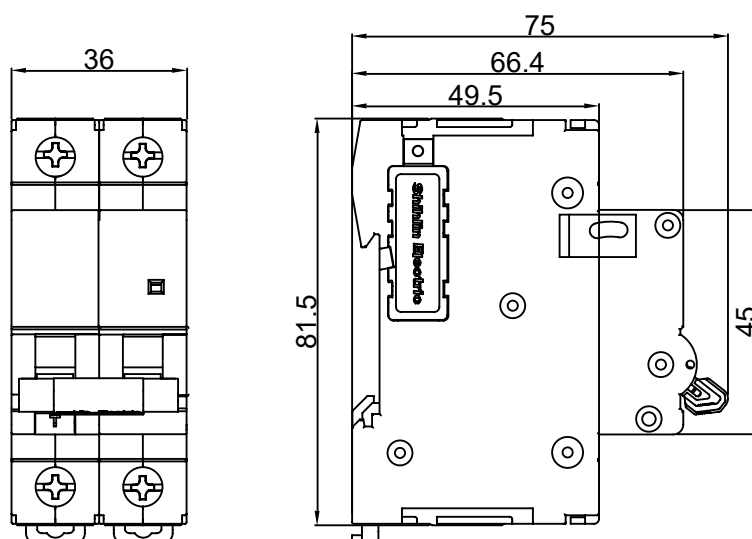

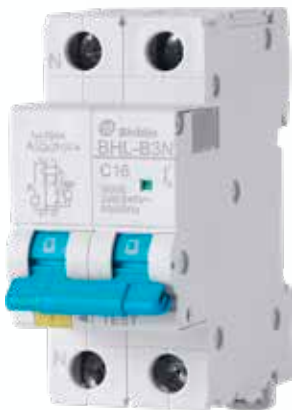

Poles (P)	Rated current (A)	Width (mm)	Weight (g)
1P+N (6kA)	6	36	
	10	36	
	16	36	
	20	36	
	25	36	
	32	36	
	40	36	
	50	36	
	63	36	

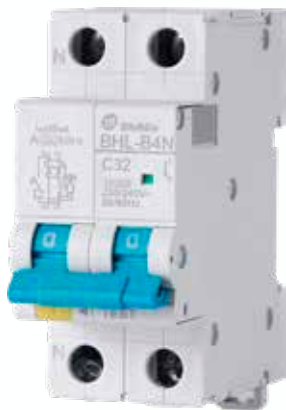

1P+N (10kA)			
	6	36	
	10	36	
	16	36	
	20	36	
	25	36	
	32	36	
	40	36	
	50	36	
	63	36	

RESIDUAL CURRENT CIRCUIT BREAKER WITH OVERCURRENT PROTECTION

BHL-B Series | Used in the "phase+neutral" circuit, single-phase or three-phase power system

Applications :

Applicable to the residential, industrial and commercial power distribution systems.
Compact size, provide with short-circuit, overload, earth-leakage and overvoltage protection.
Excellent short circuit and overload protection are able to break phase and neutral simultaneously

Type designation :

BHL-B	3S	1	C	6	A	30	
Type	Rated short-circuit breaking capacity (kA)	Poles (P)	Tripping characteristics	Rated current In (A)	Residual current type	Rated sensitivity current (mA)	Optimal function (2P)
BHL-B	3S: 6kA (At AC 230V)	1: 1P+ N	C Type: 5~10In	6, 10, 16, 20, 25, 32	A, AC	10, 30	-

Standard : IEC 61009


Technical specification :

- Rated voltage: AC 230V
- Rated current: 6~32A
- Rated sensitivity current: 10mA, 30mA
- Rated short-circuit breaking capacity: 6,000A
- Tripping characteristics: C type: 5~10In
- Mechanical life: 20,000 operations
- Wiring capabilities: Stranded wire-10mm² / Rigid wire-16mm²
- Ambient temperature: -30°C~+70°C
- Residual current type: A, AC

Features :

- Excellent anti-electromagnetic interference capability which avoid the fault trip caused by a transient over-voltage.
- Tool-free installation with the application of standard DIN-rail TH35mm, makes installation easy and convenient.
- Reliable usage with N phase breakpoint.
- Electronic type A/AC type leakage protection.
- AC class: Tripping is ensured for sinusoidal, alternating currents, whether they be quickly applied or slowly increase.
- A class: Tripping is ensured for sinusoidal, alternating residual currents as well as for pulsed DC residual currents, whether they be quickly applied or slowly increase.

Dimension :

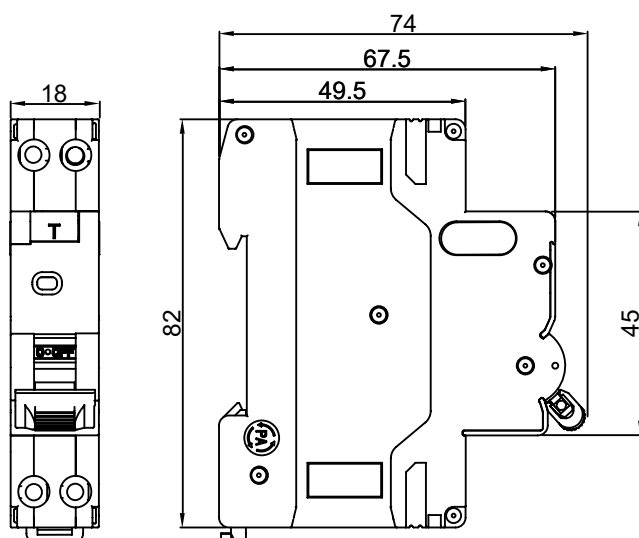



Poles (P)	Rated current (A)	Width (mm)	Weight (g)
1P+N	6	18	
	10	18	
	16	18	
	20	18	
	25	18	
	32	18	

RESIDUAL CURRENT CIRCUIT BREAKER

BHR-A Series

Applications :

Applicable to the residential, industrial and commercial power distribution systems to prevents shocks caused by earth leakage which could be fatal.

Type designation :

BHR-A	42	25	A	030
Model	Poles (P)	Rated current In(A)	Residual current Type	Rated sensitivity current I Δ n (mA)
BHR-A	42: 2P 44: 4P	25, 32, 40, 63	A, AC	030: 30 100: 100 300: 300

Standard : IEC61008-1


Technical Specification :


- Rated voltage : AC240V (2P), AC415V (4P)
- Rated current : 25A, 32A, 40A, 63A
- Rated sensitivity current : 30mA, 100mA, 300mA
- Rated short-circuit breaking capacity : 10,000 A
- Residual current type : A, AC
- Mechanical life : 20,000 Operations
- Wiring capabilities : Stranded wire-4~25mm²
- Ambient temperature : +30°C

Features :

- Test button(yellow) provides earth-leakage testing function during the regular maintenance.
- Tool-free installation with the application of standard DIN-rail TH35mm, makes installation easy and convenient.
- AC class: Tripping is ensured for sinusoidal, alternating currents, whether they be quickly applied or slowly increase.
- A class: Tripping is ensured for sinusoidal, alternating residual currents as well as for pulsed DC residual currents, whether they be quickly applied or slowly increase.


Dimension :

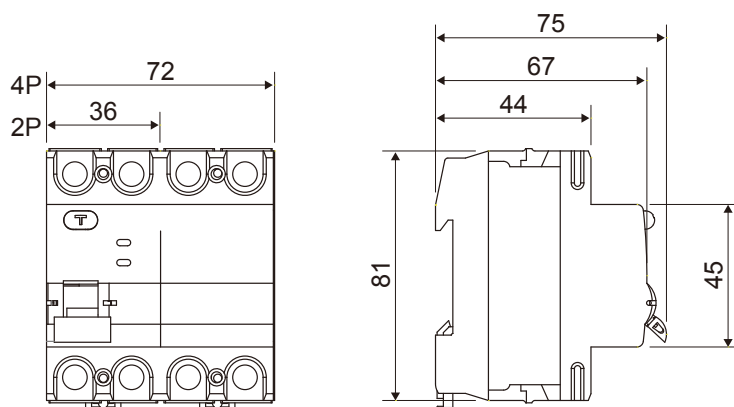



2P

Poles (P)	Rated current (A)	Width (mm)	Weight (g)
2P	25	36	216
	32	36	216
	40	36	216
	63	36	216



4P

4P	25	72	366
	32	72	366
	40	72	366
	63	72	366

ISOLATION SWITCH BHG Series

Applications :

Applicable to the residential, industrial and commercial power distribution systems which provided with the protection and control of the circuit, mainly used as a main switch for the subsidiary circuits. It also can be used in the application with low switching and low consumption electrical appliances and illumination, providing On/Off and isolation of the circuit.

Type designation :

BHG	4P	32A
Type	Poles (P)	Rated current In (A)
BHG	1, 2, 3, 4	32, 40, 63, 80, 100

Standard : IEC 60947-3 / GB 14048.3

Technical Specification :

- Rated voltage : AC 230/400V
- Rated current : 32~100A
- Mechanical life : 50,000 operations
- Wiring capabilities : Stranded wire-16mm² / Rigid wire-25mm²
- Ambient temperature : -5°C~+40°C



Poles (P)	Rated current (V)	Rated current (A)	Width (mm)	Weight (g)
1P 	230	32	18	85
	230	40	18	85
	230	63	18	85
	230	80	18	85
	230	100	18	85
2P 	400	32	36	172
	400	40	36	172
	400	63	36	172
	400	80	36	172
	400	100	36	172
3P 	400	32	54	259
	400	40	54	259
	400	63	54	259
	400	80	54	259
	400	100	54	259
4P 	400	32	72	346
	400	40	72	346
	400	63	72	346
	400	80	72	346
	400	100	72	346

Over / Under Voltage Protective Device with Auto-reset BHZ Series

Applications :

Use in single phase AC circuit to provide protection when over-voltage or under-voltage occurred cause by a break in neutral line or voltage unbalanced cause by the loads.

Type designation :

BHZ2	25
↓	↓
Model	Rated current in(A)
BHZ2	25, 32, 40, 50, 63

Technical Specification :


- Rated voltage : AC230V, 50Hz
- Rated current : 25A, 32A, 40A, 50A, 63A
- Rated insulation voltage : 690V
- Rated impulse withstand voltage : 4kV
- Voltage protection range : 0~450V
- Mechanical life : 20,000 operations
- Wiring capabilities : Stranded wire-10mm² / Rigid wire-16mm²
- Ambient temperature : -40°C~+70°C, cannot exceed average of 35°C in 24hr
- Pollution degree : 3

Model	Rated current (A)	Over voltage		Under voltage		Operation time		Reset	Weight(g)
		Operating value	Reset value	Operating value	Reset value	Over voltage	Under voltage		
BHZ2-25	25	> 275V	255V~265V 260	50V~160V	180V~190V 185	275V: 3-15s 300V: 1-3s 350V: 0.25-0.75s 400V: 0.1-0.2s	0.7s	30s±5s	210
BHZ2-32	32								
BHZ2-40	40								
BHZ2-50	50								
BHZ2-63	63								


Features :

- With over and under voltage protection, the device will trip when the voltage supply is over or under value. If the voltage supply return to normal, the device will automatically reset without any manual intervention.
- High voltage detection accuracy and precision operating time using microcontroller, reliable protection .
- Using magnetic latching relay as internal part, energy conservation and environmental protection with low power consumption under normal operation.

Dimension :


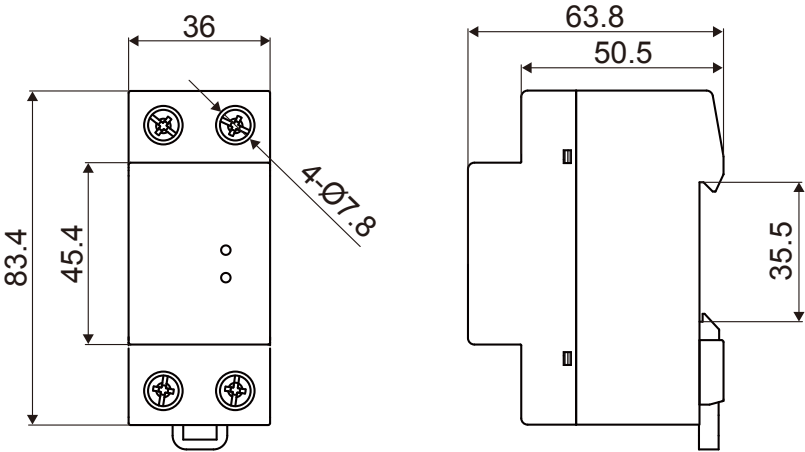


Poles (P)	Rated current (A)	Width (mm)	Weight (g)
	25	36	210
	32	36	210
	40	36	210
	50	36	210
	63	36	210

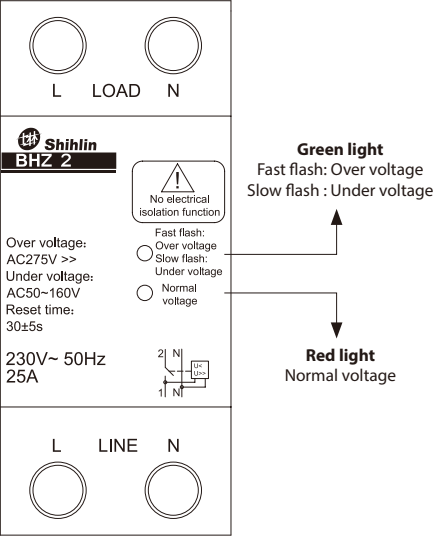


Over-current protection characteristic


BHA series (4.5/6) 、BHA-B series (6kA/10kA) 、BHN series 、BHL series (4.5/6kA)

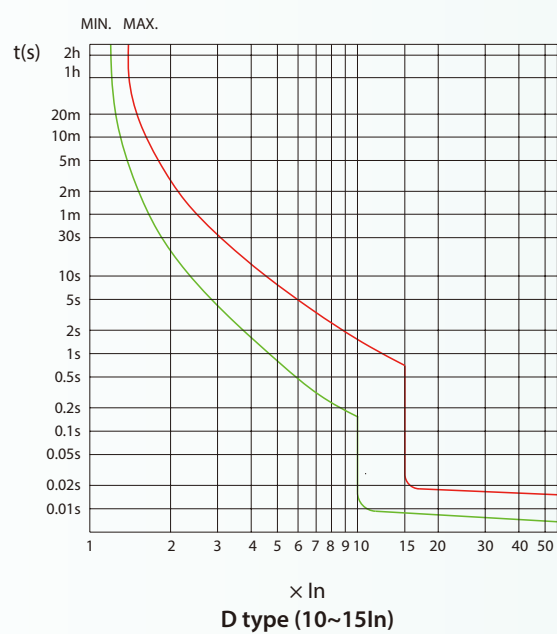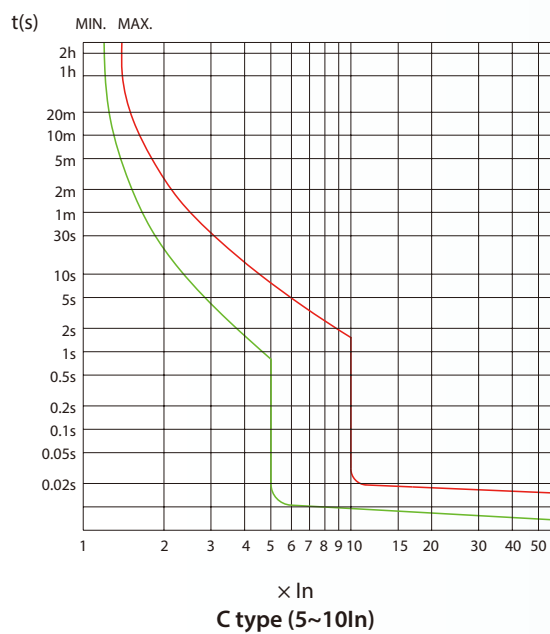

BHA DC series

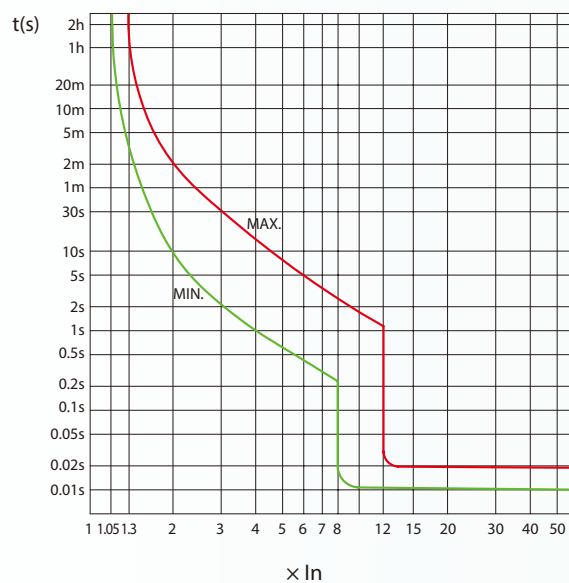

BHA series (125AF)

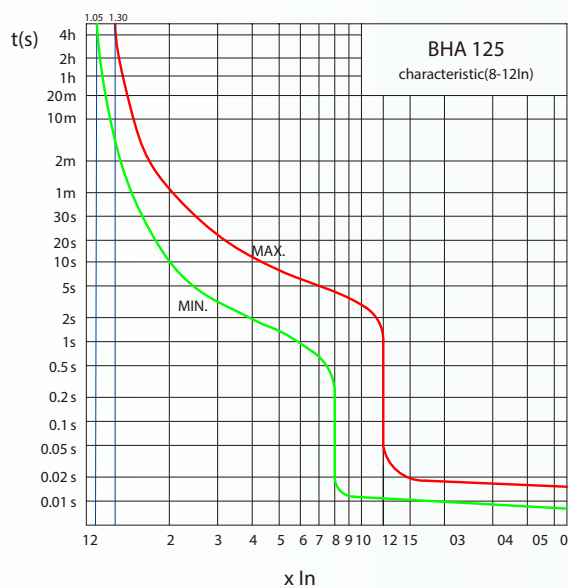

Wiring connection:

Connection	Rating	Tightening torque	Bare copper wire (without clamp)		Bare copper wire (with clamp)	Multi-cables (with clamp)	
			Rigid	Flexible	Flexible	Rigid	Flexible
	—		Cu	Cu	Cu	Cu	Cu
	1-25A		1-25mm ²	1-16mm ²	1-25mm ²	—	—
	32-63A		1-35mm ²	1-25mm ²	1-35mm ²	3x16mm ²	3x10mm ²



CIRCUIT BREAKER (MCCB / ELCB / EMCCB / MCB)


Breaker & Switchgear System



AIR CIRCUIT BREAKER



AUTOMATIC TRANSFER SWITCHES

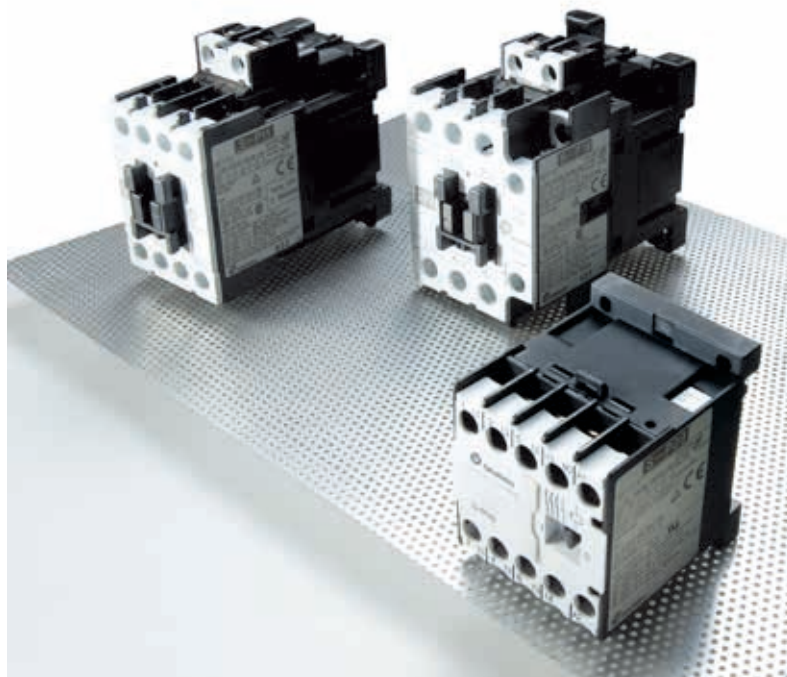

MAGNETIC CONTACTOR / SWITCH (CONTACTOR / MS / MMS)



SURGE PROTECTIVE
DEVICE



SMART METER



INVERTER



LOW VOLTAGE
POWER CAPACITORS

SHIHLIN ELECTRIC & ENGINEERING

MOTOR CONTROL (CONTACTOR/ MS/ MMS), CIRCUIT BREAKER (MCCB/ ELCB/ EMCCB/ MCB), AIR CIRCUIT BREAKER, AUTOMATIC TRANSFER SWITCHES (Panel Board Type/ Residential Unit Use), SURGE PROTECTIVE DEVICE, LOW VOLTAGE POWER CAPACITORS, SMART METER, INVERTER



Breaker & switchgears overseas sales dept.

3F, No.9, Sec. 1, Chang-an E. Rd., Zhongshan Dist., Taipei City 10441, Taiwan

T. +886-2-2541-9822 F. +886-2-2581-2665

e-mail. b.export@seec.com.tw

<http://circuit-breaker.seec.com.tw>

Headquarters

16F, No.88, Sec. 6, Zhongshan N. Rd., Shilin Dist., Taipei City 11155, Taiwan

T. +886-2-2834-2662 F. +886-2-2836-6187

<http://www.seec.com.tw>

Distributor

B260107E.BHA-OB